

NBF 11/29




Oil Pattern Distance 44 Oil Per Board **Reverse Brush Drop** 40 40 ul **Forward Oil Total Volume Oil Total** 17.96 mL **Reverse Oil Total** 12.12 mL 30.08 mL **Tank Configuration** Tank A Conditioner Tank B Conditioner Only A **ICE** FIRE

| 2L 2R 2 10 74 0.0 1.4 1.4 2960 4L 4R 3 14 99 1.4 7.3 5.9 3960 6L 6R 3 14 87 7.3 13.2 5.9 3480 6L 6R 2 18 58 13.2 18.3 5.1 2320 9L 9R 2 18 46 18.3 23.4 5.1 1840 12L 12R 2 22 34 23.4 29.6 6.2 1360 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 2L 2R 0 26 0 40.0 44.0 4.0 0 |
|---|
| 6L 6R 3 14 87 7.3 13.2 5.9 3480 6L 6R 2 18 58 13.2 18.3 5.1 2320 9L 9R 2 18 46 18.3 23.4 5.1 1840 12L 12R 2 22 34 23.4 29.6 6.2 1360 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| 6L 6R 2 18 58 13.2 18.3 5.1 2320 9L 9R 2 18 46 18.3 23.4 5.1 1840 12L 12R 2 22 34 23.4 29.6 6.2 1360 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| 9L 9R 2 18 46 18.3 23.4 5.1 1840 12L 12R 2 22 34 23.4 29.6 6.2 1360 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| 12L 12R 2 22 34 23.4 29.6 6.2 1360 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| 12L 12R 3 22 51 29.6 38.9 9.3 2040 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| 2L 2R 0 26 0 38.9 40.0 1.1 0 |
| |
| 21 28 0 26 0 400 440 40 0 |
| 21 21 0 20 0 40.0 44.0 4.0 0 |

| 2 2L 2R 0 22 0 40.0 32.0 -8.0 0 3 13L 13R 3 18 45 32.0 24.4 -7.6 1800 4 10L 10R 2 18 42 24.4 19.3 -5.1 1680 5 9L 9R 3 14 69 19.3 13.4 -5.9 2760 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | | | | | | | | | | |
|--|---|-------|------|-------|-------|---------|-------|------|------|-------|
| 2 2L 2R 0 22 0 40.0 32.0 -8.0 0 3 13L 13R 3 18 45 32.0 24.4 -7.6 1800 4 10L 10R 2 18 42 24.4 19.3 -5.1 1680 5 9L 9R 3 14 69 19.3 13.4 -5.9 2760 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | | START | STOP | LOAD5 | SPEED | CROSSED | START | END | FEET | T.OIL |
| 3 13L 13R 3 18 45 32.0 24.4 -7.6 1800 4 10L 10R 2 18 42 24.4 19.3 -5.1 1680 5 9L 9R 3 14 69 19.3 13.4 -5.9 2760 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | 1 | 2L | 2R | 0 | 26 | 0 | 44.0 | 40.0 | -4.0 | 0 |
| 4 10L 10R 2 18 42 24.4 19.3 -5.1 1680 5 9L 9R 3 14 69 19.3 13.4 -5.9 2760 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | 2 | 2L | 2R | 0 | 22 | 0 | 40.0 | 32.0 | -8.0 | 0 |
| 5 9L 9R 3 14 69 19.3 13.4 -5.9 2760 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | 3 | 13L | 13R | 3 | 18 | 45 | 32.0 | 24.4 | -7.6 | 1800 |
| 6 7L 7R 3 14 81 13.4 7.5 -5.9 3240 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | 4 | 10L | 10R | 2 | 18 | 42 | 24.4 | 19.3 | -5.1 | 1680 |
| 7 4L 4R 2 14 66 7.5 3.6 -3.9 2640 | 5 | 9L | 9R | 3 | 14 | 69 | 19.3 | 13.4 | -5.9 | 2760 |
| • | 6 | 7L | 7R | 3 | 14 | 81 | 13.4 | 7.5 | -5.9 | 3240 |
| 8 2L 2R 0 10 0 3.6 0.0 -3.6 0 | 7 | 4L | 4R | 2 | 14 | 66 | 7.5 | 3.6 | -3.9 | 2640 |
| | 8 | 2L | 2R | 0 | 10 | 0 | 3.6 | 0.0 | -3.6 | 0 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Cleaner Ratio Main Mix NA
Cleaner Ratio Back End Mix NA
Cleaner Ratio Back End Distance NA

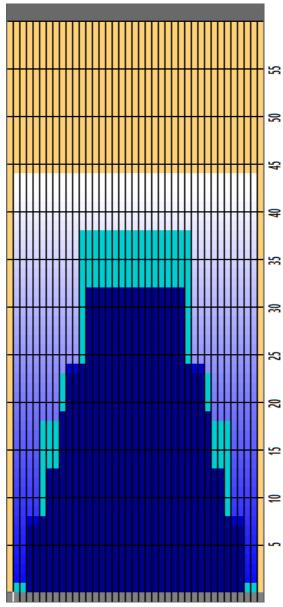

| Item | 3L-7L:18L-18R | 8L-12L:18L-18R | 13L-17L:18L-18R | 18L-18R:17R-13R | 18L-18R:12R-8R | 18L-18R:7R-3R | |
|----------------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|--|
| escription | Outside Track:Middle | Middle Track:Middle | Inside Track:Middle | Mlddle: Inside Track | Middle:Middle Track | Middle:Outside Track | |
| rack Zone Ratio | 3.49 | 1.42 | 1 | 1 | 1.42 | 3.49 | |
| 1350 — 1350 — 1200 — | | | | | | | |
| | | | | | | | |
| 900 | | | | | | | |